HSF Pb RoHS

PART NUMBER CODING

BTE01 F XXX-XXX XX X X 1

- F: M:Male, F:Female
- XXX: Housing High
- XXX: No.of Pins
- XX: Comtact Plating — G1=3u"Gold, G2=5u"Gold, S1=3u"Gold/Tin, S2=5u"Gold/Tin
- X: Insulator Material/Colour — C:Natural
- X: Packing — T:Tube, P:Tube+CAP, R:Tape&Reel+CAP
- 1

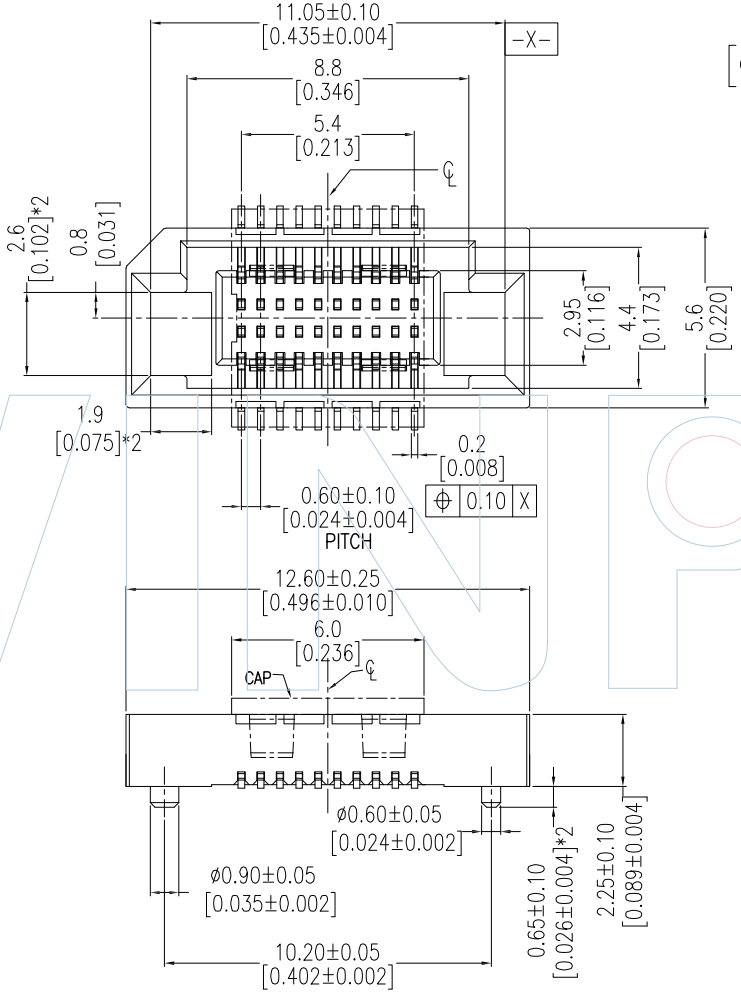

Recommended P.C.B Layout(REF.)

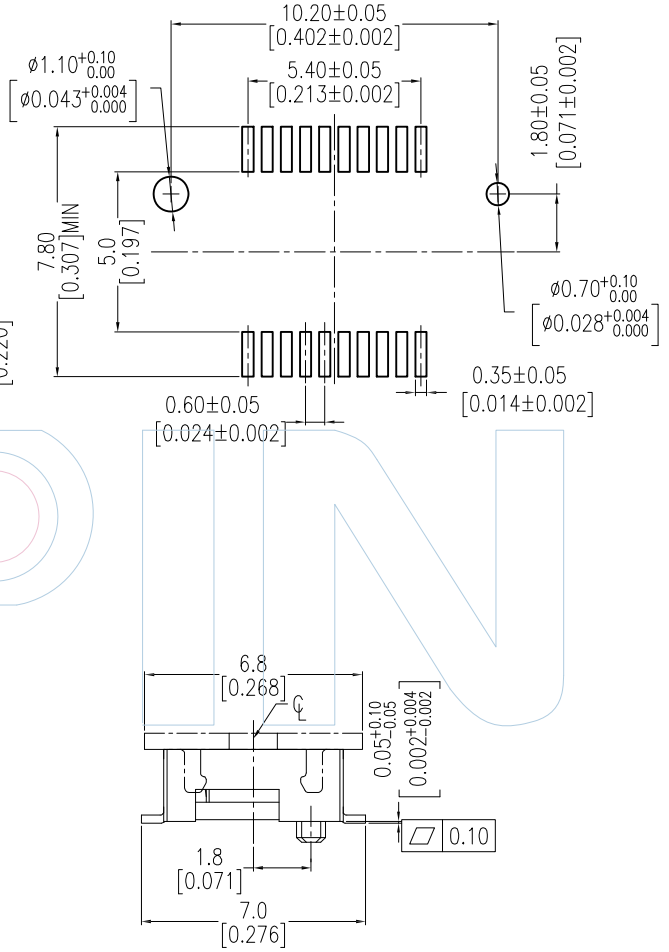

WINPIN

Tel:+86 769 82581808
FAX:+86 769 81766192
E-Mail:winpin@win-pin.com
Http:www.win-pin.com

PART NO: BTE01FXXX-XXXXXXX1

TITLE: 0.60mm B TO B FEMALE 180°SMT TYPE

NOTES:
Current Rating:.0.5AMP
Voltage Rating:50V AC/DC
Contact Resistance:20mΩ Max
Withstand Voltage:200V AC/DC
Insulation Resistance:100Megohm Min
Operation Temperature:-40℃ to +80℃

Housimg Material:LCP+ 30%G.F(UL94V-0)
Contact Material:Phosphor Bronze
Contact plating:Au or Sn over Ni

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE
A0	2015/06/25	NEW	Hua.ZT	——	Hua.ZT