



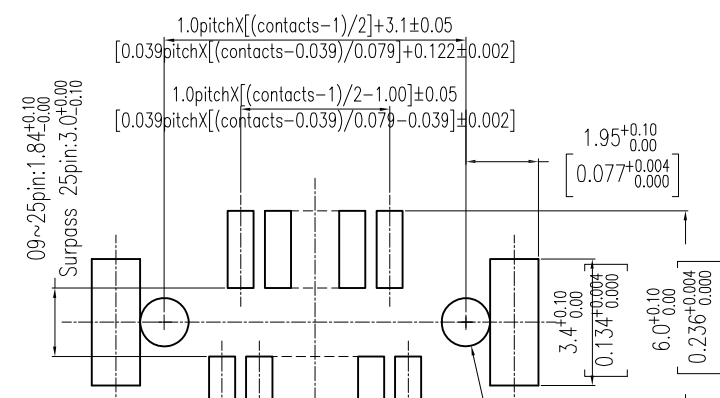



Recommended P.C.B Layout(REF.)

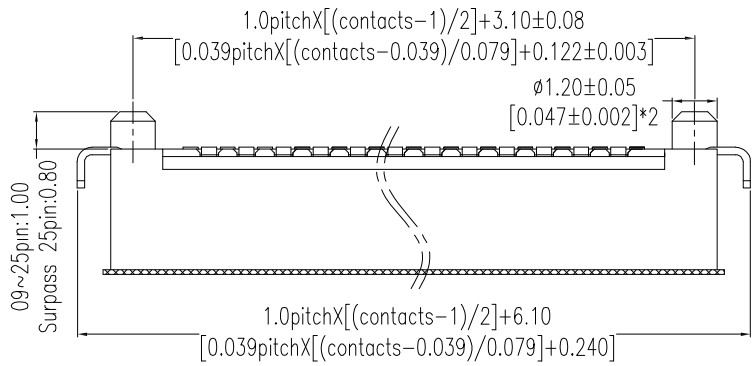

PART NUMBER CODING

BTF01 M XXX-XXX XX X X 1

M: Male Housing High No. of Pins Contact Plating Insulator Material/Colour Packing
 G1=3u"Gold G2=5u"Gold S1=3u"Gold/Tin S2=5u"Gold/Tin T:Tube P:Tube+CAP R:Tape&Reel+CAP

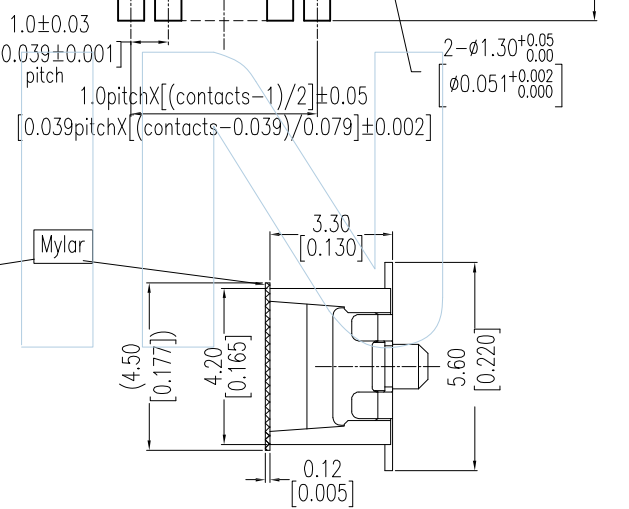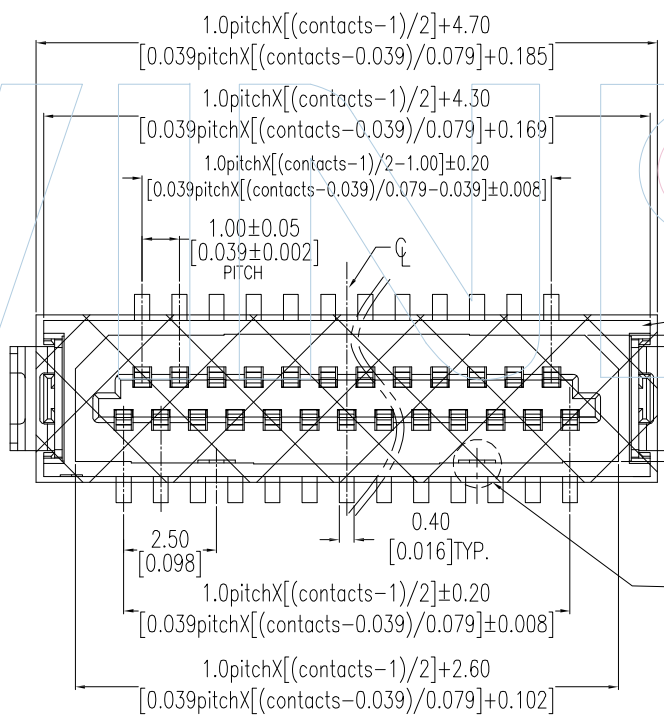

Feature becomes single feature placed centrally on 09 to 25 ways.



Tel: +86 769 82581808 FAX: +86 769 81766192
 E-Mail: winpin@win-pin.com Http: www.win-pin.com

NOTES:
 Current Rating: 0.5AMP
 Voltage Rating: 150V AC/DC
 Contact Resistance: 50mΩ max
 Withstand Voltage: 250V AC/DC
 Insulation Resistance: 500MΩ Min
 Operation Temperature: -20°C to +125°C

Housing Material: LCP+30%G/F(UL94V-0)
 Contact Material: Phosphor Bronze
 Fitting Material: Brass
 Contact plating: Su or Au over Ni
 Fitting plating: Sn over Ni

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC TOLERANCES ARE:
 DECIMALS Angle
 X.X: ±0.40 ± 3°
 X.XX: ±0.25
 X.XXX: ±0.15

PART NO: BTF01MXXX-XXXXXXX1

TITLE: 1.00mm B TO B "H" TYPE SMT MALE

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Hua.ZT		Hua.ZT
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE