



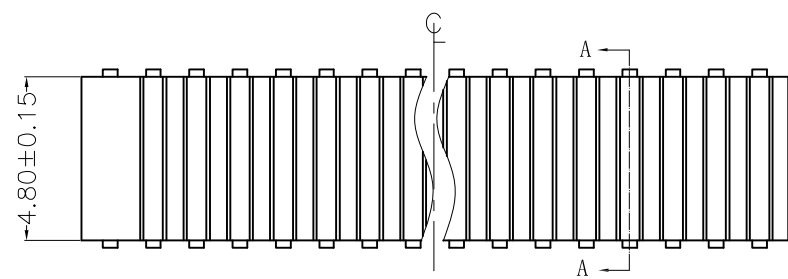



Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

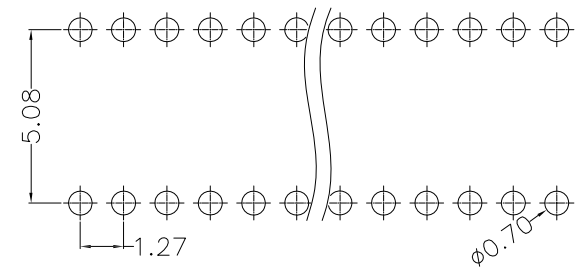

PART NUMBER CODING

FHCR35- 2 XX XX X U X 1

- No.of Pins Row:02-50Pin
- Contact Plating
  - G0:Gold Flash
  - G1:3U"Gold
  - G2:5U"Gold
  - G3:10U"Gold
  - G4:15U"Gold
  - G5:20U"Gold
  - G6:30U"Gold
  - S0:Gold Flash/Tin
  - S1:3U"Gold/Tin
  - S2:5U"Gold/Tin
  - S3:10U"Gold/Tin
  - S4:15U"Gold/Tin
  - S5:20U"Gold/Tin
  - S6:30U"Gold/Tin
  - SN:Tin
- Insulator Material/Colour C:PA6T/Black
- Packing
  - T=Tube
  - P=Tube+Cap
  - R=Tape&Reel+Cap

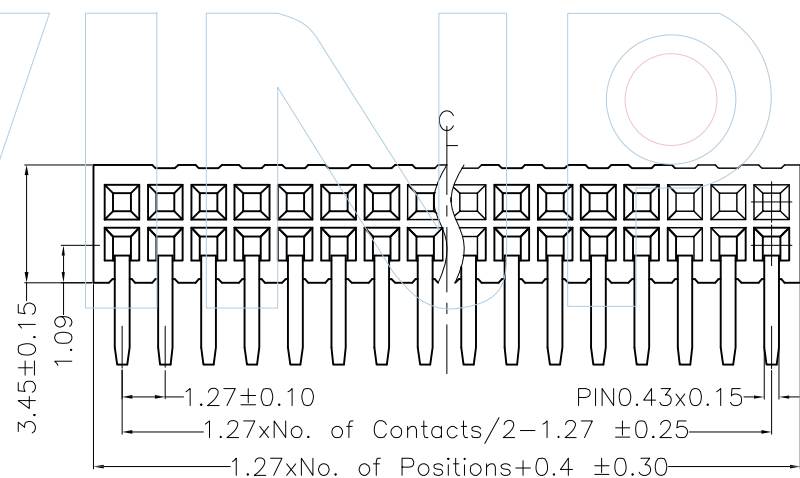

SECTION: A-A



Tel:+86 769 82581808 FAX:+86 769 81766192  
E-Mail:winpin@win-pin.com Http:www.win-pin.com

PART NO: FHCR35-2XXXXXU1

TITLE: FH1.27mm Dual Side Insert Female 90° H=3.45mm

NOTES:  
Current Rating:1.0AMP  
Contact Resistance:20mΩ Max  
Insulation Resistance:1000MΩ Min  
Withstand Voltage:500V AC/Minute  
Operation Temperature:-55°C to +125°C

Contact Material:Phosphor Bronze  
Contact Plating:Au over Ni  
Insulator Material:Polyester (UL94V-0)  
Standard:PA6T+30%GF Black

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC TOLERANCES ARE:  
DECIMALS Angle  
X.X:±0.40 ± 3°  
X.XX:±0.25  
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Huan.Tan	Huan.Tan	
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE