


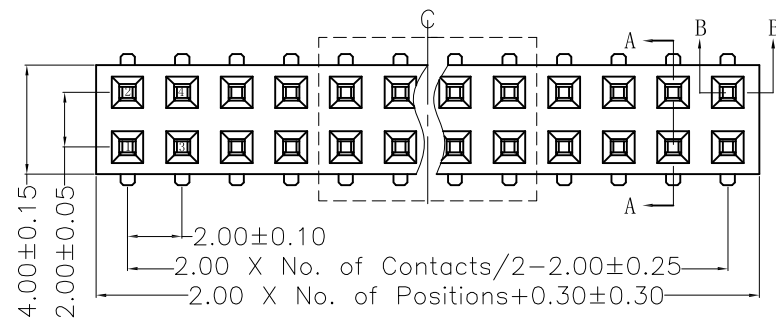
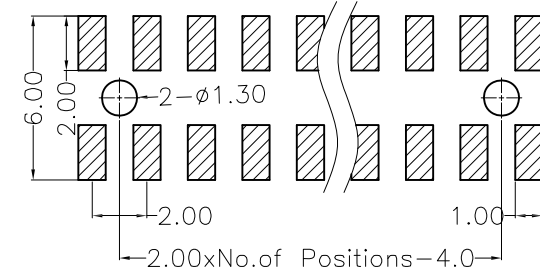


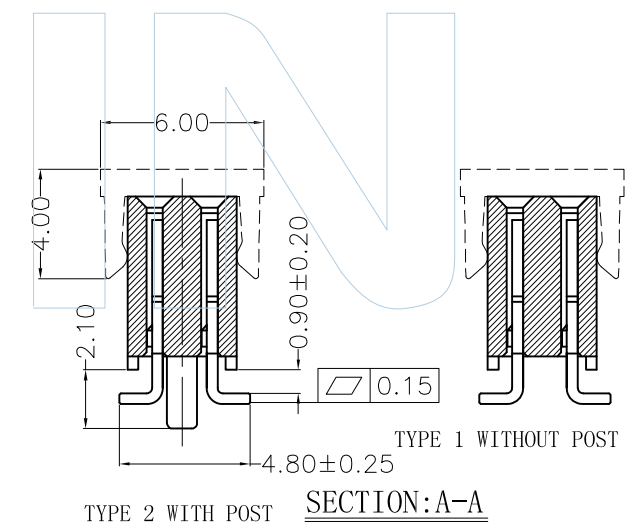

Recommended P.C.B Layout(TOP Side)
(PCB BOARD TOLERANCE±0.05)

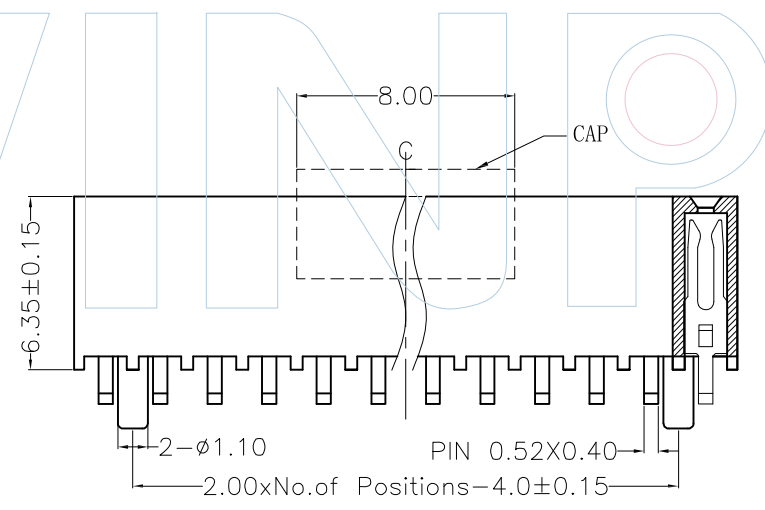

PART NUMBER CODING

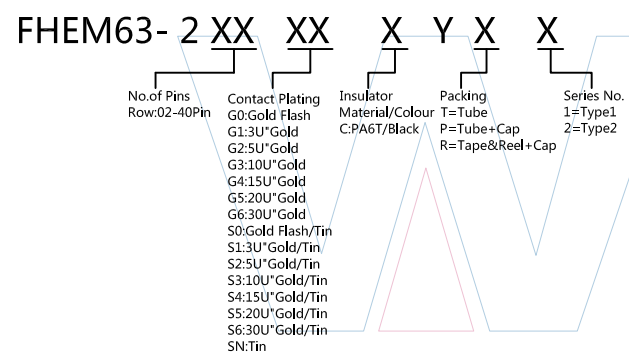

SECTION: B-B

SECTION: A-A



Tel: +86 769 82581808 FAX: +86 769 81766192
E-Mail: winpin@win-pin.com Http: www.win-pin.com

PART NO: FHEM63-2XXXXXX

TITLE: FH2.00mm Dual Female H=6.35mm SMT

NOTES:
Current Rating: 2.0AMP
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstand Voltage: 500V AC/Minute
Operation Temperature: -55°C to +125°C

Contact Material: Phosphor Bronze
Contact Plating: Au over Ni
Insulator Material: Polyester (UL94V-0)
Standard: PA6T+30%GF Black

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC TOLERANCES ARE:
DECIMALS Angle
X.X: ±0.40 ± 3°
X.XX: ±0.25
X.XXX: ±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE