


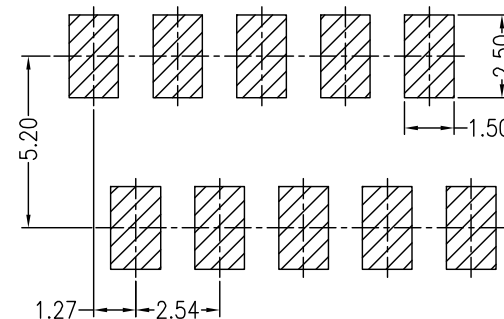




Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

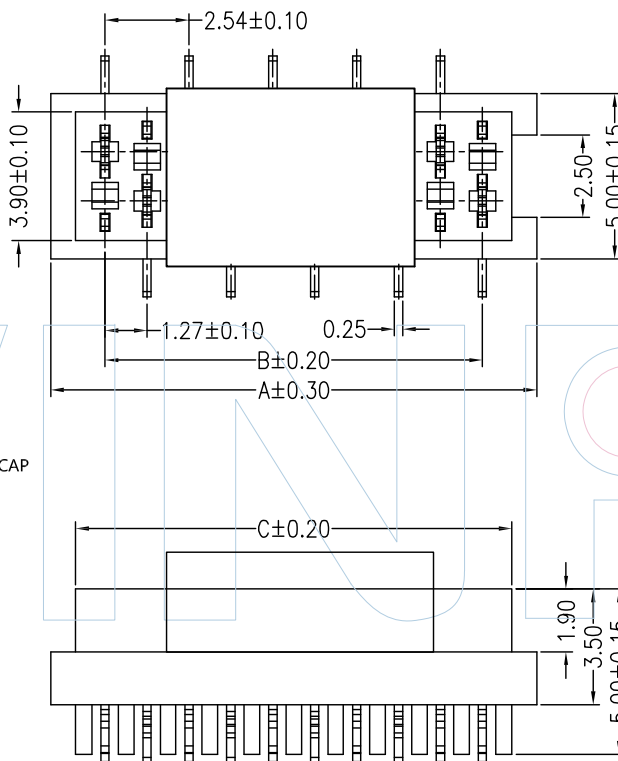

**PART NUMBER CODING**

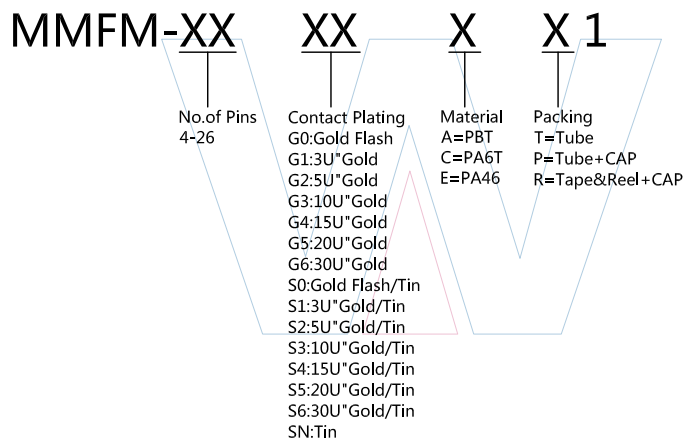

Specification & Ordering Information:

Circuit	Part No.	Dimension			Q'ty /Tube
		A	B	C	
04	MMFM-04XXXX1	7.00	3.81	5.60	82
06	MMFM-06XXXX1	9.54	6.35	8.14	60
08	MMFM-08XXXX1	12.08	8.89	10.68	48
10	MMFM-10XXXX1	14.62	11.43	13.22	39
12	MMFM-12XXXX1	17.16	13.97	15.76	33
14	MMFM-14XXXX1	19.70	16.51	18.30	29
16	MMFM-16XXXX1	22.24	19.05	20.84	26
18	MMFM-18XXXX1	24.78	21.59	23.38	23
20	MMFM-20XXXX1	27.32	24.13	25.92	21
22	MMFM-22XXXX1	29.86	26.67	28.46	17
24	MMFM-24XXXX1	32.40	29.21	31.00	14
26	MMFM-26XXXX1	34.94	31.75	33.54	11



Tel: +86 769 82581808 FAX: +86 769 81766192  
E-Mail: winpin@win-pin.com Http: www.win-pin.com

NOTES:  
Current Rating: 1.0AMP  
Withstand Voltage: 500V AC/DC  
Contact Resistance: 20mΩ Max  
Insulation Resistance: 1000MΩ Min  
Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
Contact Plating: Sn over Ni  
Insulator Material: High Temperature plastic (UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC TOLERANCES ARE:  
DECIMALS Angle  
X.X: ±0.40 ± 3°  
X.XX: ±0.25  
X.XXX: ±0.15

PART NO: MMFM-XXXXXX1

TITLE: Micro Match Socket 180° SMT Without Latch

SCALE 1:1  
UNIT MM  
PROJ.   
SHEET

A0	2015/06/25	NEW	Hua.ZT		Hua.ZT
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE