



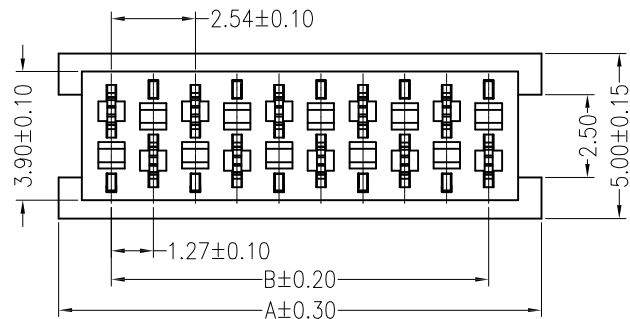

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

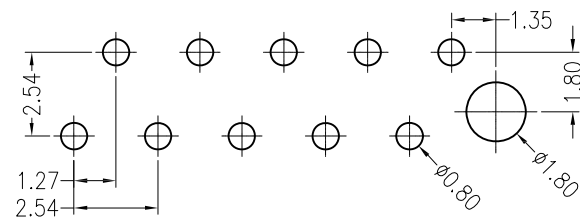

PART NUMBER CODING


MMFS-XX XX X X 1

No.of Pins
4-26

Contact Plating
G0:Gold Flash
G1:3U*Gold
G2:5U*Gold
G3:10U*Gold
G4:15U*Gold
G5:20U*Gold
G6:30U*Gold
S0:Gold Flash/Tin
S1:3U*Gold/Tin
S2:5U*Gold/Tin
S3:10U*Gold/Tin
S4:15U*Gold/Tin
S5:20U*Gold/Tin
S6:30U*Gold/Tin
SN:Tin

Material
A=PBT
C=PA6T
E=PA46

Packing
T=Tube

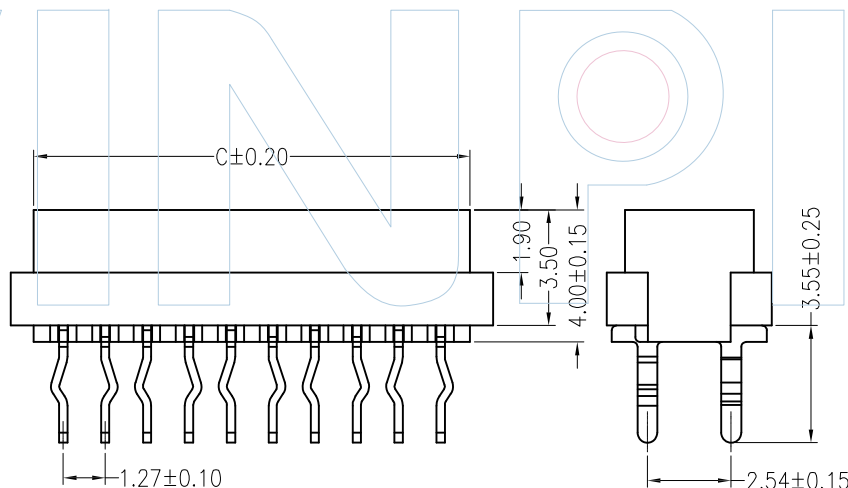

Specification & Ordering Information:

Circuit	Part No.	Dimension			Q'ty /Tube
		A	B	C	
04	MMFS-04XXXX1	7.00	3.81	5.60	82
06	MMFS-06XXXX1	9.54	6.35	8.14	60
08	MMFS-08XXXX1	12.08	8.89	10.68	48
10	MMFS-10XXXX1	14.62	11.43	13.22	39
12	MMFS-12XXXX1	17.16	13.97	15.76	33
14	MMFS-14XXXX1	19.70	16.51	18.30	29
16	MMFS-16XXXX1	22.24	19.05	20.84	26
18	MMFS-18XXXX1	24.78	21.59	23.38	23
20	MMFS-20XXXX1	27.32	24.13	25.92	21
22	MMFS-22XXXX1	29.86	26.67	28.46	17
24	MMFS-24XXXX1	32.40	29.21	31.00	14
26	MMFS-26XXXX1	34.94	31.75	33.54	11



Tel:+86 769 82581808 FAX:+86 769 81766192
E-Mail:winpin@win-pin.com Http:www.win-pin.com

NOTES:
Current Rating: 1.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze
Contact Plating:Sn over Ni
Insulator Material:High Temperature plastic (UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

PART NO: MMFS-XXXXX1

TITLE: Micro Match Socket 180° DIP Without Latch

SCALE 1:1
UNIT MM
PROJ.
SHEET

A0	2015/06/25	NEW	Hua.ZT		Hua.ZT
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE