





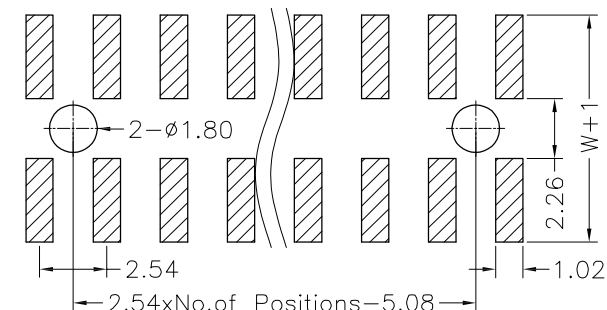


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

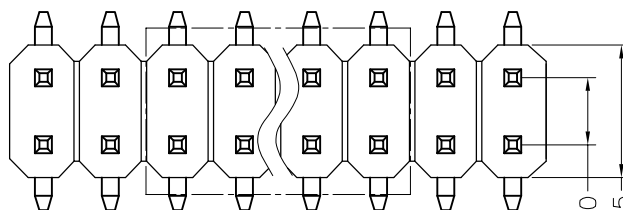

PART NUMBER CODING

PHFM25-22 XX XX X XXX X X

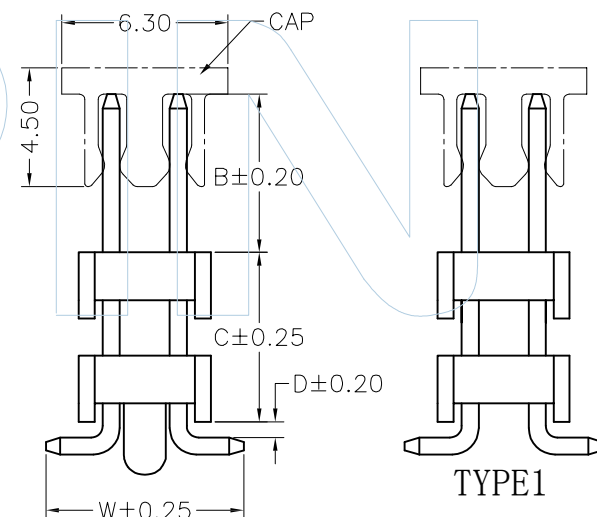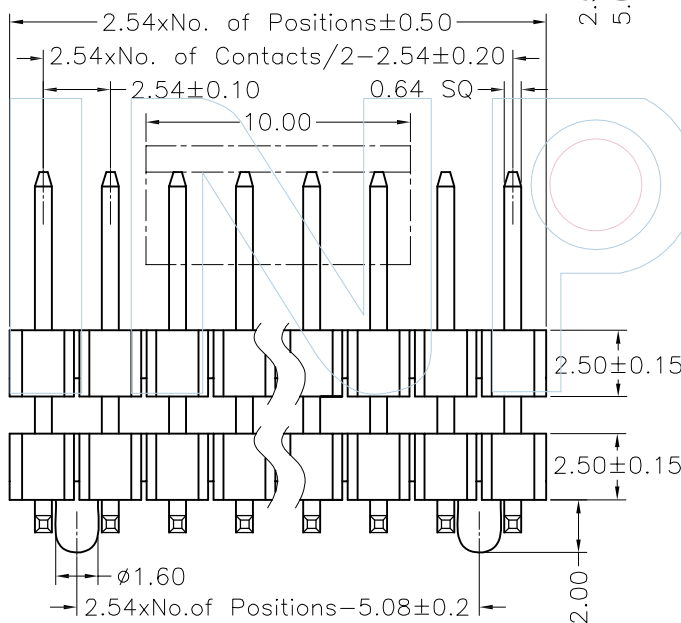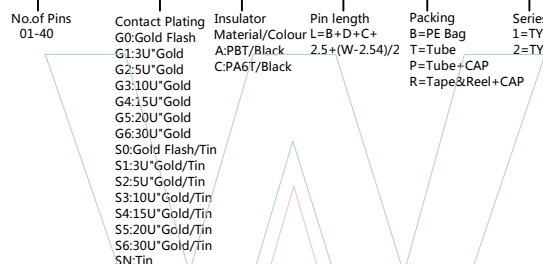

Dimension antitheses list

PART NO.	B	C	D	W
PHFM25-22XXXXXXXXXX	6.0		0.6	7.5
PHFM25-22XXXXX250XX	8.0	11.4	0.6	7.5
PHFM25-22XXXXX106XX	3.5	4.0	0.6	7.5



Tel:+86 769 82581808 FAX:+86 769 81766192
E-Mail:sales@winpin.net Http://www.winpin.net

PART NO: PHFM25-22XXXXXXXXXX

TITLE: PH2.54 Dual ROW DOUBLE Plastic SMT H=2.5+2.5

NOTES:
Current Rating:3.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material: Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PA6T/PBT+30%GF
(UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A1	2021/12/13	新增料号	GF.He		Andy
A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE