




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

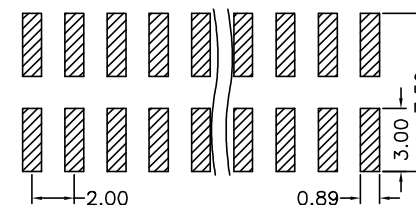

PART NUMBER CODING



BHEM05- XX XX 2 X X 1

No.of Pins
06-60P

Contact Plating
G0:Gold Flash
G1:3U" Gold
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:20U" Gold
G6:30U" Gold
S0:Gold Flash/Tin
S1:3U" Gold/Tin
S2:5U" Gold/Tin
S3:10U" Gold/Tin
S4:15U" Gold/Tin
S5:20U" Gold/Tin
S6:30U" Gold/Tin
SN:Tin

Color
B:Black
U:Blue
W:White

Packing
A:Tray
T:Tube

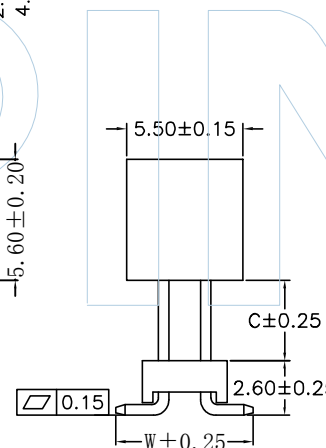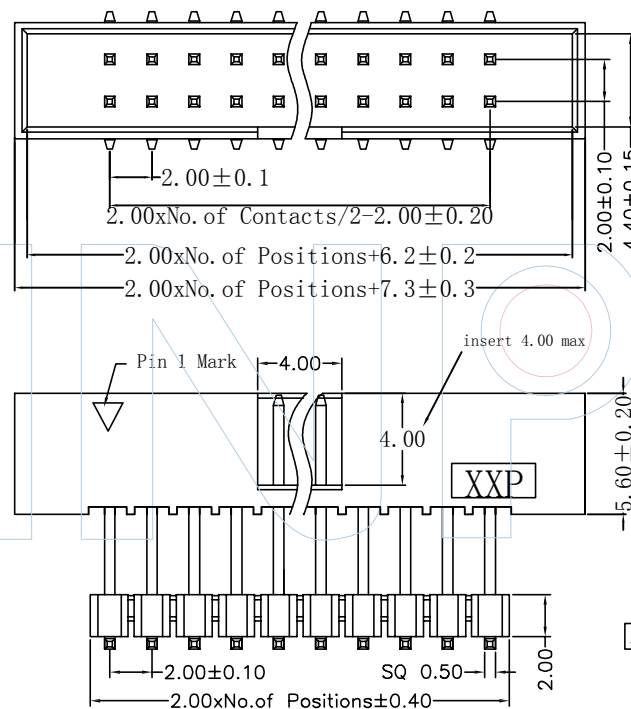

Dimension antitheses list			
PART NO	W	C	
BHEM05-XXXX2XX1	7.60	—	
BHEM05-60XX2XX1	7.60	5.60	



Tel:+86 769 82581808
E-Mail:sales@winpin.net

FAX:+86 769 81766192
Http:www.winpin.net

PART NO: BHEM05-XXXX2XX1

TITLE: 2.00 Box Header SMT H=5.6 Add Housing

NOTES:
Current Rating: 2 AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PA6T+30%GF(UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
.X.XX:±0.25
X.XXX:±0.15

SCALE 1:1
UNIT MM
PROJ.
SHEET

REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE
A1	2021/09/09	新增料号	Gf.He	—	Andy
A0	2015/06/25	NEW	Hua.ZT	—	Hua.ZT