







PART NUMBER CODING
W25007-1 S 02 XX B T 1

No.of pins
02P

Contact plating
SN: Tin
S0: Gold Flash/Tin
S1: 3U" Gold/Tin
S2: 6U" Gold/Tin
S3: 10U" Gold/Tin
S4: 15U" Gold/Tin

Color
B=Black

Packing
T=Tube

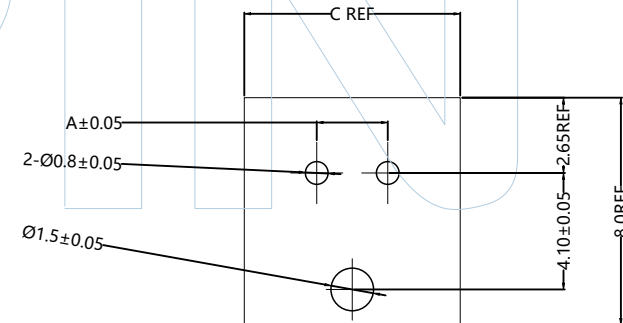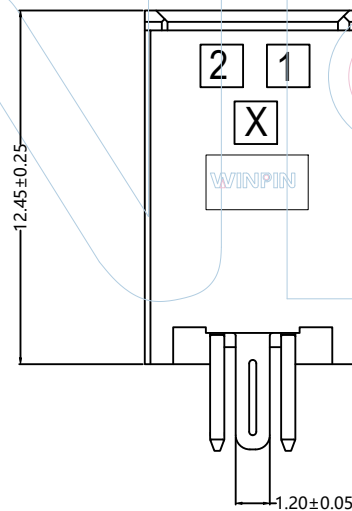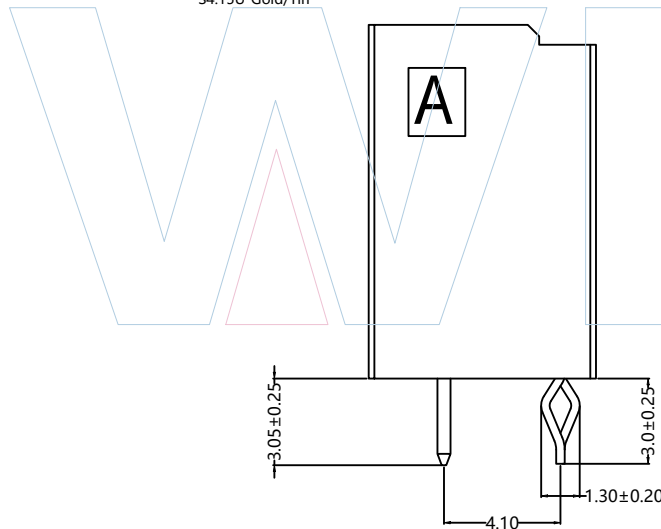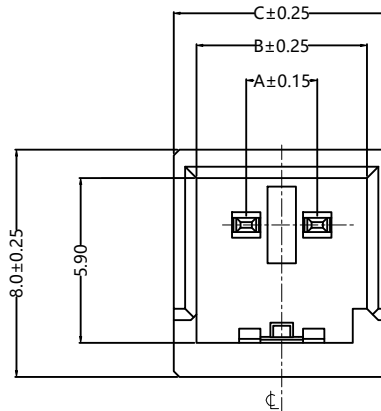

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

Pins	Dimensions		
	A	B	C
02	2.50	6.20	7.60



Tel: +86 769 82581808 FAX: +86 769 81766192
E-Mail: sales@winpin.net Http: www.winpin.net

PART NO: W25007-1S02XXBT1

TITLE: 2.5mm Wafer 180°DIP


NOTES:
Current Rating: 5.0AMP
Withstand Voltage: 1500V/AC
Voltage Rating: 250V/AC
Contact Resistance: 20mΩ Max
Insulation Resistance: 100MΩ Min
Operation Temperature: -40°C to +125°C

MATERIAL:
Insulator Material: PA9T+30%G/F (UL94V-0),
Contact: Brass
Contact Plating: Sn over Ni or Gold/Tin
Terminal: phosphor Bronze
Terminal Plating: Sn over Ni

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X: ±0.40 ± 3°
X.XX: ±0.25
X.XXX: ±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2025/03/28	NEW	L.F.Li		Andy
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE



C 产品示意图

胶塞

PVC管

PE膜

1.一端塞入胶塞,
将产品装入真空管内
630*9.5*17.5mm
HTF-630130175A

2.塞入胶塞

3.缠PE膜

260管为一扎
用PE膜固定每扎真空管两端,
包住两端利角,以防划破胶袋

外箱标签

透明胶

外箱

6

打包装带及贴外箱标签

5

封箱

4

PVC管装入外箱
660x190x150mm

Pins	W25007-1S02SNBT1	
	管/PCS	外箱/管
1*2P	79PCS	260

WINPIN

Tel:+86 769 82581808
E-Mail:sales@winpin.net

FAX:+86 769 81766192
Http:www.winpin.net

PART NO: W25007-1S02XXBT1

TITLE: 2.5mm Wafer 180°DIP 1*2P 包装图

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2025/03/28	NEW	LF.Li		Andy
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE