



PART NUMBER CODING


W25007-2 S XX XX B T 1

No.of pins
Per row
04P~10P



Contact plating
S4:15U*Gold/Tin
SN: Tin

Color
B=Black



Packing
T=Tube

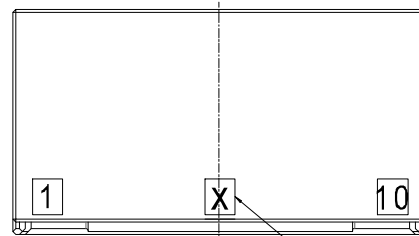


KEYING

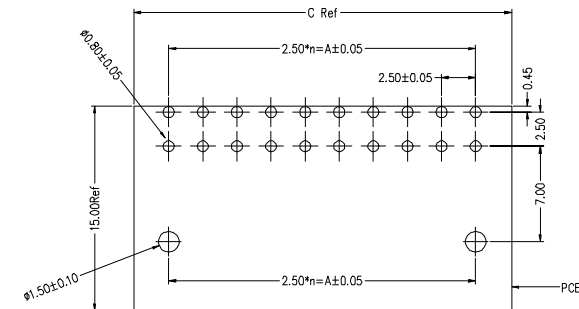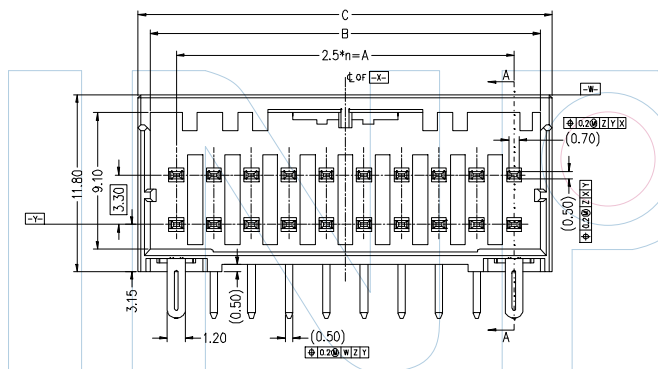

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

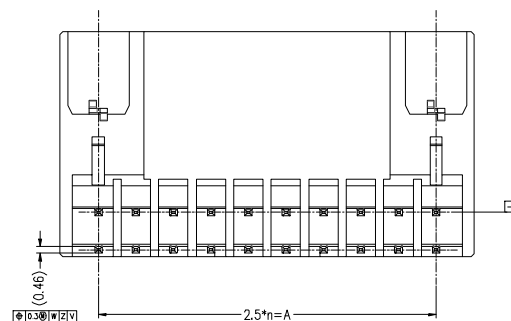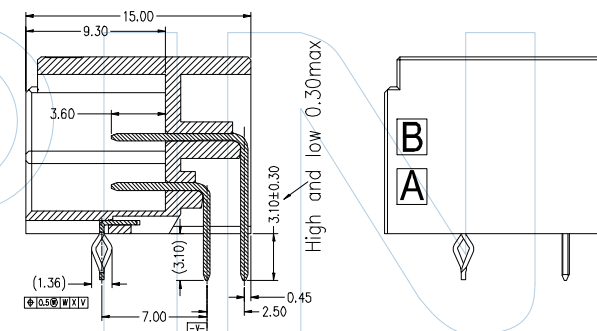

20P
X-KEY

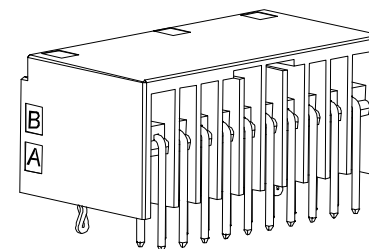

Pins	Dimensions		
	A	B	C
2x02	2.50	6.00	7.60
2x03	5.00	8.50	10.10
2x04	7.50	11.00	12.60
2x06	12.50	16.00	17.60
2x10	22.50	26.00	27.60

WINPIN

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: W25007-2RXXXXXT1

TITLE: 2.5mm Wafer 90°DIP

NOTES:
Current Rating:5.0AMP
Withstand Voltage:1500V/AC
Voltage Rating:250V/AC
Contact Resistance:20mΩ Max
Insulation Resistance:100MΩ Min
Operation Temperature:-40°C to +125°C

MATERIAL:
Insulator Material:LCP(UL94V-0)
Contact:Copper Alloy
Contact Plating:Au or Sn over Ni

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE 1:1

UNIT MM

PROJ.

SHEET 1/2

A0	2024/06/15	NEW	GF.He		Andy
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE

