




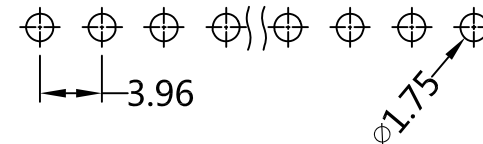

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

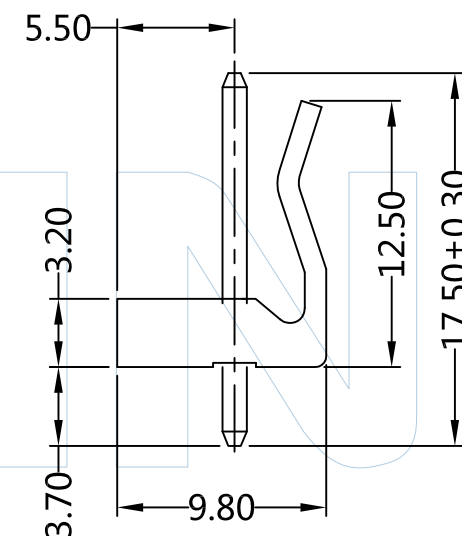

PART NUMBER CODING
W39601-1 XX S XX X X 1
No.of pins 02-16P Contact plating SN: Tin Color W=White B=PE Bag Packing

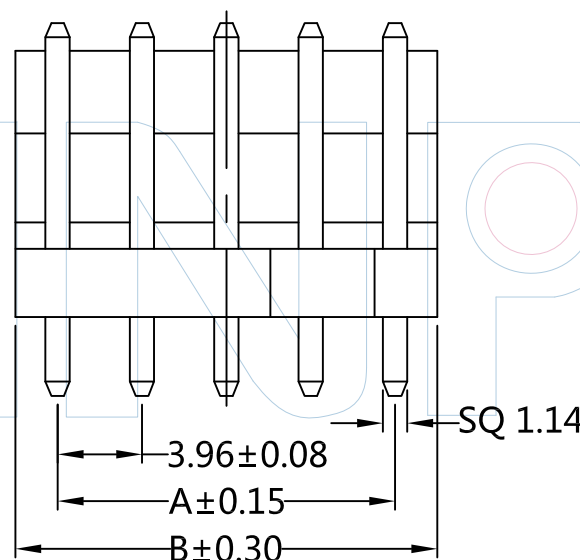

Pins	Dimensions	
	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36



Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: W39601-1XXSXXX1

TITLE: MX3.96mm Wafer 180° DIP

NOTES:
Current Rating: 7.0A(AWG#18)
Voltage Rating: 250V AC/DC
Withstand Voltage: 1500V AC/DC
Contact Resistance: 10m Ω Max
Insulation Resistance: 1000M Ω Min
Operation Temperature: -40°C ~ +105°C
Applicable Terminal: T39601-XXX1
Applicable Housing: H39601-1XXX1

MATERIAL:
Contact: Brass
Contact Plating: Sn over Ni
Insulator: PA66(UL94V-2)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X: ± 0.40 $\pm 3^\circ$
X.XX: ± 0.25
X.XXX: ± 0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Hua.ZT		Hua.ZT
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE