

PART NUMBER CODING

PHFR25-11 XX XX X XXX X 3

No.of Pins
01-40

Contact Plating
G0:Gold Flash
G1:3U"Gold
G2:5U"Gold
G3:10U"Gold
G4:15U"Gold
G5:20U"Gold
G6:30U"Gold
S0:Gold Flash/Tin
S1:3U"Gold/Tin
S2:5U"Gold/Tin
S3:10U"Gold/Tin
S4:15U"Gold/Tin
S5:20U"Gold/Tin
S6:30U"Gold/Tin
SN:Tin





Insulator
Material/Colour
A:PBT/Black
B:PA9T/Black
C:PA6T/Black

Pin length
L=2A+2D
+2.5+2.5

Packing
B=PE Bag
T=Tube

Dinmension antitheses list

ITEM	A	W	D	
Standard1	3.60	5.94	1.40	
Alternate				

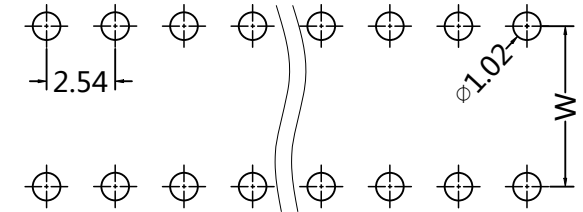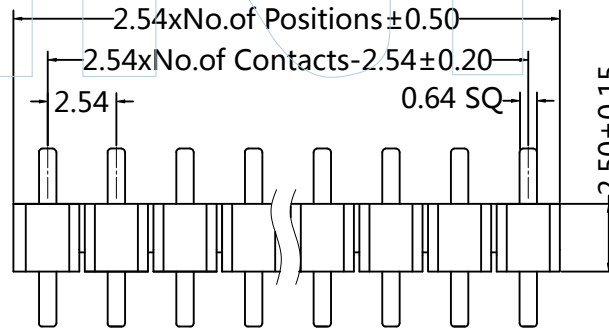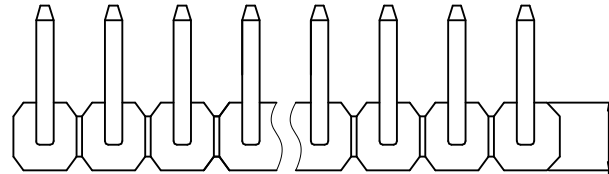

WINPIN

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: PHFR25-11XXXXXXXXX3

TITLE: PH 2.54mm Single ROW 90° H=2.5mm C-TYPE

NOTES:

Current Rating:3.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material: Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PA6T/PBT/PA9T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE