

HSF Pb RoHS

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE+0.05)




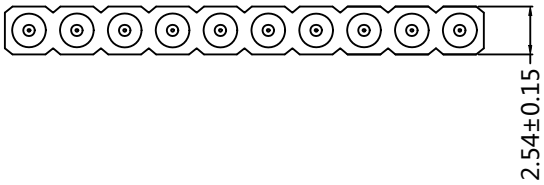


PART NUMBER CODING

MPFS30-1 XX XX X 119 X 1

- No.of Pins: 01-40pin
- Contact Plating:
  G0:Gold Flash
  G1:3U"Gold
  G2:5U"Gold
  G3:10U"Gold
  G4:15U"Gold
  G5:20U"Gold
  G6:30U"Gold
  S0:Gold Flash/Tin
  S1:3U"Gold/Tin
  S2:5U"Gold/Tin
  S3:10U"Gold/Tin
  S4:15U"Gold/Tin
  S5:20U"Gold/Tin
  S6:30U"Gold/Tin
  SN:Tin
- Insulator Material/Colour: A:PPS/Black
- Packing: A:Tray, B:PE Bag, T:Tube

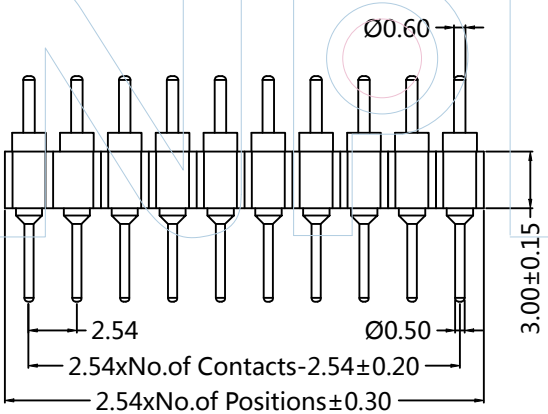



WINPIN

WINPIN
Tel:+86 769 82581808 FAX:+86 769 81766192
E-Mail:sales@winpin.net Http:www.winpin.net

PART NO: MPFS30-1XXXXX119X1

TITLE:2.54mm Machined Pin Header Single Row 180° H=3.0 L=11.96

NOTES:
Current Rating:.3.0AMP
Contact Resistance:10mΩ Max
Withstand Voltage:1000V AC/DC
Mechanical Life:Min 500 cycles
Connecting Pin:Ø0.60/Ø0.50mm
Operation Temperature:-40℃ to +105℃

Material:
Sleeve:Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PPS(UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE
A0	2015/06/25	NEW	Nike.TAN		Huan.Tan