
HSF Pb RoHS

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)




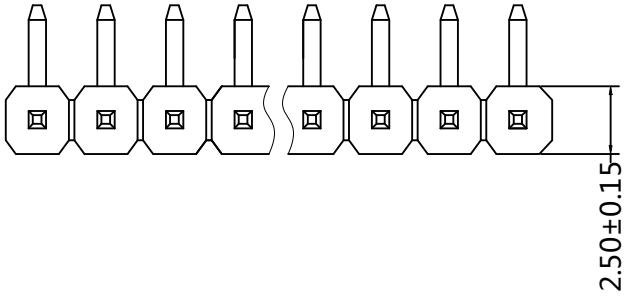


PART NUMBER CODING

PHFR25-21 XX XX X XXX X 1

No.of Pins	Contact Plating	Insulator Material/Colour	Pin lenght	Packing
01-40	G0:Gold Flash G1:3U"Gold G2:5U"Gold G3:10U"Gold G4:15U"Gold G5:20U"Gold G6:30U"Gold S0:Gold Flash/Tin S1:3U"Gold/Tin S2:5U"Gold/Tin S3:10U"Gold/Tin S4:15U"Gold/Tin S5:20U"Gold/Tin S6:30U"Gold/Tin SN:Tin	A:PBT/Black B:PA9T/Black C:PA6T/Black	L=A+B+C+ D+1.25	T=Tube O=PE Bag

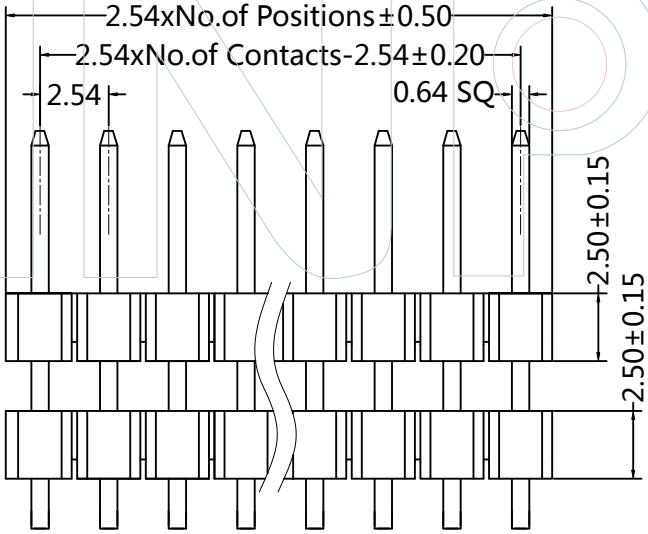

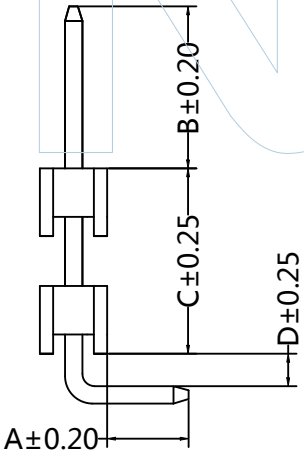

Dinmension antitheses list				
ITEM	A	B	C	D
Standard1	3.00	6.00		1.20
Alternate				

WINPIN

WINPIN
Tel:+86 769 82581808 FAX:+86 769 81766192
E-Mail:sales@winpin.net Http:www.winpin.net

PART NO: PHFR25-21XXXXXXXXX1

TITLE: PH 2.54mm Single ROW 90° H=2.5mm Double Plastic

NOTES:
Current Rating:3.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material: Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PA9T/PA6T/PBT+30%GF
(UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE
A0	2015/06/25	NEW	Huan.Tan	———	Huan.Tan