

HSF Pb RoHS

Recommended P.C.B L ayout(Top Side)
(PCB BOARD TOLERANCE±0.05)

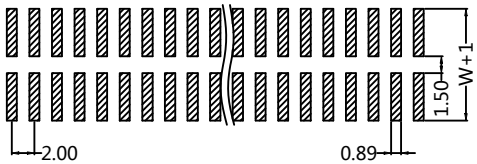


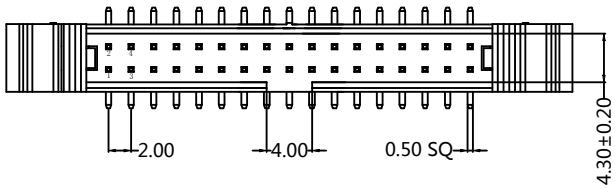


PART NUMBER CODING

EJEM1- XX XX X X X X


No.of Pins	Contact Plating	Latch type	Color	Packing	Insulator Material
06-64P	G0:Gold Flash G1:3U"Gold G2:5U"Gold G3:10U"Gold G4:15U"Gold G5:20U"Gold G6:30U"Gold S0:Gold Flash/Tin S1:3U"Gold/Tin S2:5U"Gold/Tin S3:10U"Gold/Tin S4:15U"Gold/Tin S5:20U"Gold/Tin S6:30U"Gold/Tin SN:Tin	L:Long Latch S:Short Latch	B:Black	A:Tray T:Tube	1:PA6T 2:PA9T




Short Latch
L1=17.00



Long Latch
L1=20.85

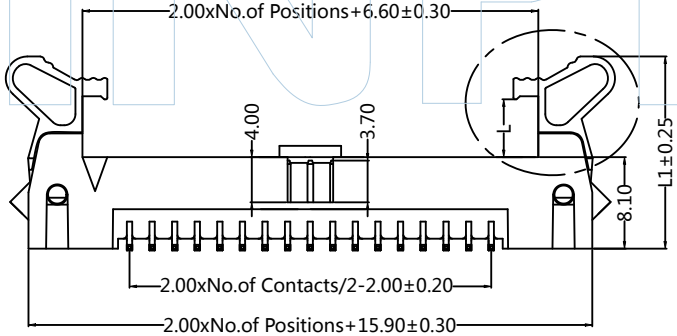



Dimension antitheses list	
ITEM	W
Standard	8.90
Alternate	

WINPIN

WINPIN
Tel:+86 769 82581808 FAX:+86 769 81766192
E-Mail:sales@winpin.net Http:www.winpin.net

PART NO: EJEM1-XXXXXXXX

TITLE: 2.00mm Ejector Header 180°SMT

NOTES:
Current Rating:.2.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material:Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PA6T/PA9T+30%G.F
(UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ±3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE
A0	2015/06/25	NEW	Hua.ZT		Hua.ZT